

# **DF005M - DF10M**

## Features

- Surge overload rating: 50 amperes peak.
- Glass passivated junction.
- · Low leakage.
- UL certified, UL #E111753.



# **Bridge Rectifiers**

## Absolute Maximum Ratings\* T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	Value						Units	
		005M	01M	02M	04M	06M	08M	10M	
V <sub>RRM</sub>	Maximum Repetitive Reverse Voltage	50	100	200	400	600	800	1000	V
V <sub>RMS</sub>	Maximum RMS Bridge Input Voltage	35	70	140	280	420	560	700	V
V <sub>R</sub>	DC Reverse Voltage (Rated V <sub>R</sub> )	50	100	200	400	600	800	1000	V
I <sub>F(AV)</sub>	Average Rectified Forward Current, @ $T_A = 40^{\circ}C$				1.5				А
I <sub>FSM</sub>	Non-repetitive Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave	50				А			
T <sub>stg</sub>	Storage Temperature Range	-55 to +150			°C				
TJ	Operating Junction Temperature			-55	5 to +15	50			°C

\*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

## **Thermal Characteristics**


Symbol	Parameter	Value	Units
P <sub>D</sub>	Power Dissipation	3.1	W
$R_{_{ hetaJ}A}$	Thermal Resistance, Junction to Ambient,* per leg	40	°C/W

\*Device mounted on PCB with 0.5 x 0.5" (13 x 13 mm).

## Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	Device	Units
V <sub>F</sub>	Forward Voltage, per bridge @ 1.0 A	1.1	V
I <sub>R</sub>	Reverse Current, total bridge @ rated $V_R$ $T_A = 25^{\circ}C$ $T_A = 125^{\circ}C$	5.0 500	μA μA
	I <sup>2</sup> t rating for fusing t < 8.35 ms	10	A <sup>2</sup> s
C <sub>T</sub>	Total Capacitance, per leg $V_R = 4.0 \text{ V}, \text{ f} = 1.0 \text{ MHz}$	25	pF

©2001 Fairchild Semiconductor Corporation

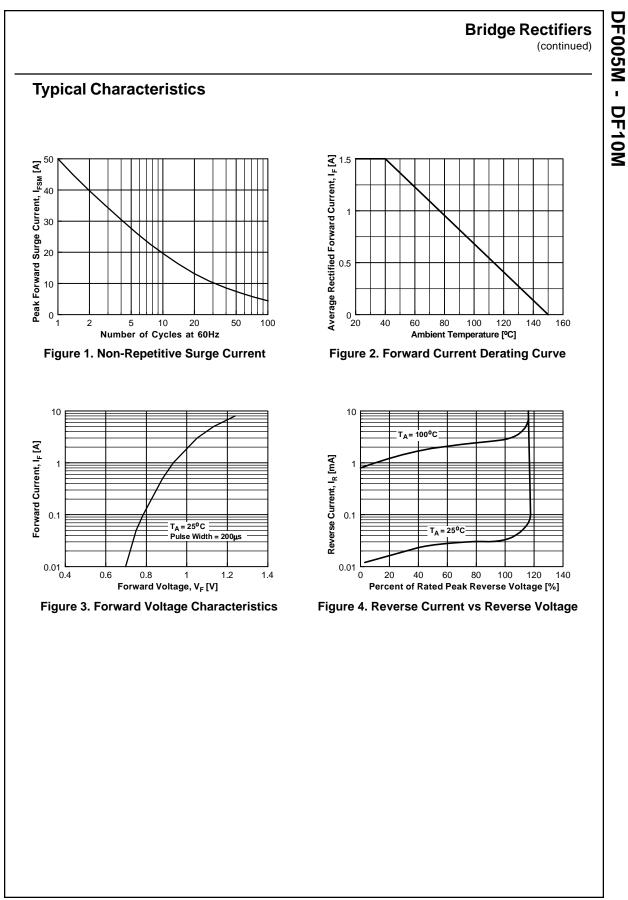

©2001 Fairchild Semiconductor Corporation

DF005M-DF10M, Rev. C

### TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™ Bottomless™ CoolFET™ CROSSVOLT™ DenseTrench™ DOME™ **EcoSPARK™** E<sup>2</sup>CMOS<sup>™</sup> EnSigna™ FACT™ FACT Quiet Series™ FAST ® FASTr™ FRFET™ GlobalOptoisolator<sup>™</sup> POP<sup>™</sup> GTO™ HiSeC™ ISOPLANAR™ LittleFET™ MicroFET™ MicroPak™ MICROWIRE™

**OPTOLOGIC™** OPTOPLANAR™ PACMAN™ Power247™ PowerTrench<sup>®</sup> QFET™ QS™ QT Optoelectronics<sup>™</sup> Quiet Series<sup>™</sup> SILENT SWITCHER®

SMART START™ VCX™ STAR\*POWER™ Stealth™ SuperSOT<sup>™</sup>-3 SuperSOT<sup>™</sup>-6 SuperSOT<sup>™</sup>-8 SyncFET™ TinyLogic™ TruTranslation<sup>™</sup> UHC™ UltraFET<sup>®</sup>

STAR\*POWER is used under license

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY. FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **PRODUCT STATUS DEFINITIONS**

**Definition of Terms** 

Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.
	In Design First Production Full Production